

CONNETTORI SCHEDA-FILO PASSO 2.50MM



2503 Femmina

Codice Adimpex: **J2503104-R**

CONN. FM p2.5 EX2503H-04P

Serie:2503-HA

p/n:250304HA054

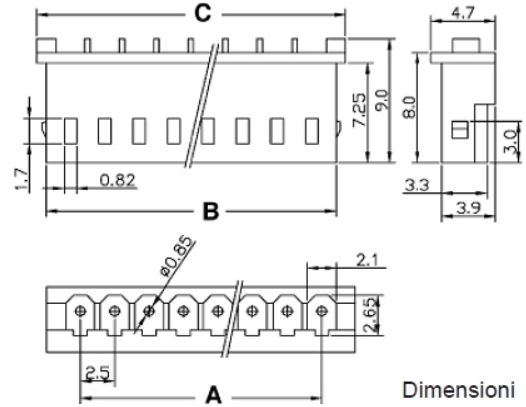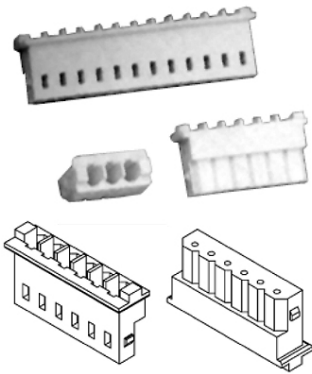

Dimensioni
 $A = 2.5 \times (n - 1)$
 $B = A + 3.3$
 $C = B + 1.6$
 $n = n^{\circ}$ posizioni

Codice Adimpex	n. posizioni
J2503102	2
J2503103	3
J2503104	4
J2503105	5
J2503106	6
J2503107	7
J2503108	8

Codice Adimpex	n. posizioni
J2503109	9
J2503110	10
J2503111	11
J2503112	12
J2503113	13
J2503114	14
J25031xx	xx (02÷20)

CARATTERISTICHE

- Passo: 2.50mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-2 colore beige
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -40°C ÷ 105°C

FEATURES

- Pitch: 2.50mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-2 beige color
- Male pins: brass, tin plated
- Operating temperature range: -40°C ÷ 105°C

