

**CONNETTORI SCHEDA-FILO PASSO 2.50MM**



**2503 Femmina**

Codice Adimpex: **J2503107-R**

CONN. FM p2.5 EX2503H-07P

Serie:2503-HA

p/n:250307HA054

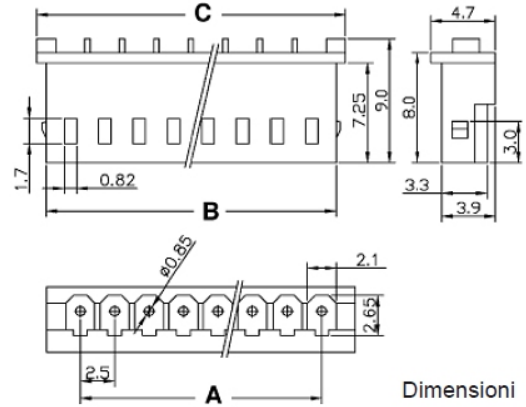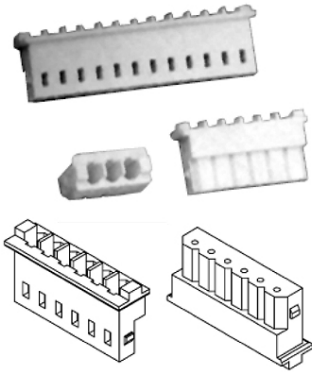

Dimensioni  
 $A = 2.5 \times (n - 1)$   
 $B = A + 3.3$   
 $C = B + 1.6$   
 $n = n^{\circ}$  posizioni

Codice Adimpex	n. posizioni	Codice Adimpex	n. posizioni
J2503102	2	J2503109	9
J2503103	3	J2503110	10
J2503104	4	J2503111	11
J2503105	5	J2503112	12
J2503106	6	J2503113	13
<b>J2503107</b>	7	J2503114	14
J2503108	8	J25031xx	xx (02÷20)

**CARATTERISTICHE**

- Passo: 2.50mm
- Corrente: 3A AC/DC
- Tensione: 250V AC/DC
- Cavo: AWG 28÷22
- Corpo: Nylon 66 UL94V-2 colore beige
- Terminali maschio: ottone stagnati
- Gamma di temperatura: -40°C ÷ 105°C

**FEATURES**

- Pitch: 2.50mm
- Current rating: 3A AC/DC
- Voltage rating: 250V AC/DC
- Applicable wires: AWG 28÷22
- Housing: Nylon 66 UL94V-2 beige color
- Male pins: brass, tin plated
- Operating temperature range: -40°C ÷ 105°C

