


Tact switches

PTH 3X6MM VERTICALE H5.0MM 280GR. RETTANGOLARE

T.S. TAS36111-050-280-5.0 BU66

Codice Adimpex: **KTH00325KA**

P/N: **TSA36111-050D531DA**

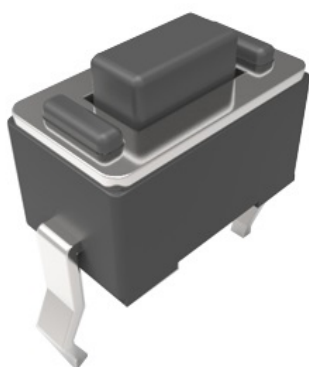

SPECIFICATIONS

Function: Momentary action
Contact Arrangement: SPST, Normally Open
Termination: THD version


Mechanical
Actuation Force: 180 ± 30gms
Life Expectancy: 100,000 Operations

Electrical
Contact Rating: 30mA @ 12V DC
Contact Strength: 200mN @ 100Hz
Contact Resistance: 50mΩ Max.
Insulation Resistance: 1000MΩ
Dielectric: Epoxy

Environmental
Operating Temperature: -25 ~ +70°C
Storage Temperature: -40°C ~ +85°C

Materials
Housing: Black PPS
Lever: PA with Nickel plating
Contact: Copper with Silver cladding
Solder: Black EP7063
Termination: Copper (HBT) + 0.2 with Silver Cladding

Packaging
Bulk Package: 1,000 pcs per plastic bag
Retail Package: Carton



Caratteristiche Tecniche:

Forza attuazione:	280 Gr.
Dimensione (mm):	3x6
Altezza:	5 mm
Attuatore quadrato:	No
Già munito di cappuccio:	No
Dustproof:	No
Montaggio:	PTH
Gamma:	Tact Switches
Orientamento:	Verticale