COMPONENTI ELETTRONICI

Via Adriatica 17/c 60022 Castelfidardo (AN)
tel.071721091 fax 0717210922
P.IVA 00207600420
email: info@adimpex.it

ZOCCOLI TORNITI PASSO 2.54MM

Zoccoli torniti passo 2.54mm x 7.62mm

Codice Adimpex: **NPD00620-R**

Z.TN g/s 7.62/20 SHA-0203-B130740A

Serie:*SHA-0740A*

p/n:*SHA-0203-B130740A*

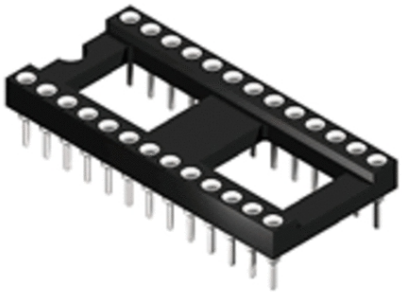

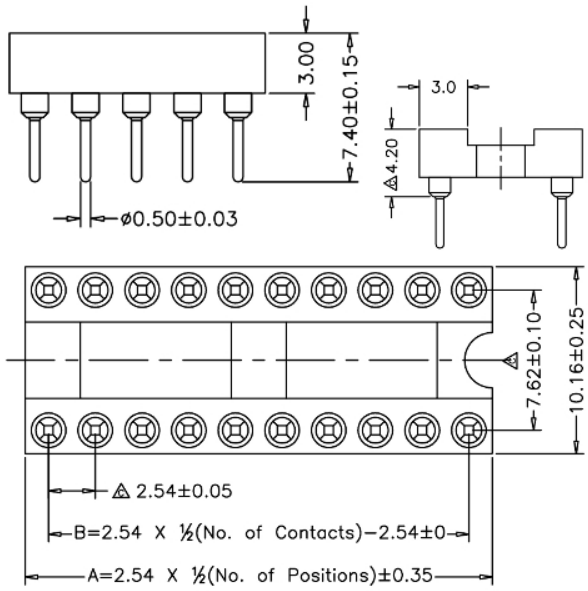

Codice Adimpex	n. posizioni
NPD00606	6
NPD00608	8
NPD00610	10
NPD00612	12
NPD00614	14
NPD00616	16

Codice Adimpex	n. posizioni
NPD00618	18
NPD00620	20
NPD00622	22
NPD00624	24
NPD00627	28

CARATTERISTICHE

- Corrente: 3 A
- Resistenza di isolamento: 1000 MΩ min.
- Resistenza di contatto: 4mΩ max.
- Rigidità dielettrica: 1000 V AC min.
- Temperatura di lavoro: -55°C ÷ +105°C
- Corpo: P.B.T. UL94V-0
- Contatto: rame berillio
- Terminale: ottone, tornito
- Finitura pin: selective gold
- Finitura clip: flash oro
- Pin utilizzabile ø: 0.40 ÷ 0.56mm

FEATURES

- *Current rate: 3 A*
- *Insulation resistance: 1000 MΩ min.*
- *Contact resistance: 4mΩ max.*
- *Dielectric voltage: 1000 V AC min.*
- *Operation temperature: -55°C ÷ +105°C*
- *Body: P.B.T. UL94V-0*
- *Contact clip: beryllium copper*
- *Sleeve: brass, machined*
- *Pin plating: selective gold*
- *Clip plating: gold flash*
- *Mating pin ø: 0.40mm ÷ 0.56mm*